

FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies

Description

The FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies are designed to sense the temperature in either a refrigerator or freezer unit, and transmit wireless temperature data to a receiver or controller.

In an FX-ZFR Series Wireless Field Bus System (mesh network) application, the transmitter communicates with FX-PC Series Programmable Controllers by means of the FX-ZFR1811 Router.

An FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assembly can also be used in a One-to-One application (non-mesh network) to communicate with an FX-WRZ7860-0 Wireless Receiver. The FX-WRZ7860-0 Receiver transfers data to the FX-PC controller by means of the Sensor Actuator (SA) communication Bus. In a typical application, one FX-WRZSTRxx-0 Series Transmitter reports to one FX-WRZ7860-0 Receiver, but up to five FX-WRZSTRxx-0 Series Transmitters can be associated with a single FX-WRZ7860-0 Receiver.

The FX-WRZSTRxx-0 Series Transmitter can transmit sensed temperature and low battery conditions to an associated router or receiver. The FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies are designed for indoor, intra-building applications only.

Refer to the *FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies Product Bulletin (LIT-12011877)* for important product application information.

Features

- Facility Explorer system design — leverages the Facility Explorer system to provide wireless temperature data transmission to a field device across the network
- application mobility and flexibility — provides a wireless alternative to hard-wired counterparts, and facilitates easy initial location and relocation of the temperature transmitter and probe assembly
- One-to-One wireless non-mesh network communication — enables quick, economical, and low-maintenance installation, which reduces overall installed costs
- wireless mesh network communication — enhances reliability through automatically forming wireless links and redundant wireless data transmission paths
- temperature monitoring/temperature range deviation alarm system — replaces manual daily temperature monitoring with continuous electronic temperature monitoring
- high degree of refrigerator/freezer narrow range accuracy — allows the temperature transmitter and probe assembly to monitor temperature-sensitive contents within the refrigerator or freezer unit
- Liquid Crystal Display (LCD) — indicates real-time status of the environment
- acrylic-encased temperature sensor probe — acts as a buffer to eliminate false temperature spikes when the refrigerator or freezer door is opened
- Fahrenheit/Celsius (°F/°C) button — toggles the display temperature between degrees Celsius and degrees Fahrenheit
- temperature sensor probe assembly connected to the temperature transmitter in the field — ensures that the temperature sensor probe assembly can be easily replaced



FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assembly

Repair Information

If the FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assembly fails to operate within its specifications, replace the unit. For a replacement assembly, contact the nearest Johnson Controls® representative.


Note: The temperature sensor probe can be ordered separately from the transmitter assembly; see the [Selection Chart](#) for ordering details.

The two AA alkaline batteries supplied with the FX-WRZSTRxx-0 Series Transmitter typically have a life of 5 years or more. The transmitter reports a low battery condition to the receiver or controller, which relays the low battery condition to the Facility Explorer system. The low battery condition is also shown on the LCD on the face of the transmitter.

Replace the transmitter batteries with two high-quality AA alkaline batteries as necessary, ensuring that the batteries are installed in the proper polarity.

Note: When replacing batteries, both batteries should be replaced at the same time. Batteries removed from this device must be recycled or disposed of in accordance with local, national, and regional regulations. Only certified technicians or qualified building maintenance personnel should service Johnson Controls products. Lithium batteries with a maximum cell voltage of 1.5 volts can be substituted to extend the period between battery replacement. Do not mix lithium and alkaline batteries in this device.

FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies (Continued)

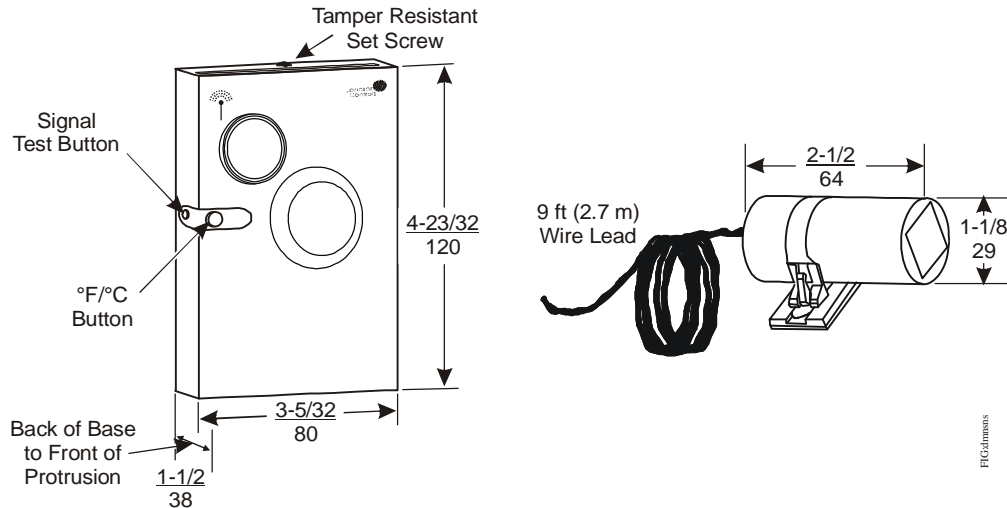

FX-WRZSTRxx-0 Dimensions and Physical Features, in./mm

Selection Chart

| Code Number | Description |
|---------------|--|
| FX-WRZSTRxx-0 | Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assembly: Includes One Temperature Transmitter Assembly, One Temperature Sensor Probe Assembly, One DIP Switch Overlay for a Mesh Network Application Using an FX-ZFR1811 Router, One DIP Switch Overlay for a Non-mesh Network One-to-One Application Using an FX-WRZ7860-0 Receiver, and Two AA Alkaline Batteries |
| FX-WRZPTR00-0 | Temperature Sensor Probe Assembly: Includes One Temperature Sensor Probe Encased in a Clear Acrylic Cylinder, a 9 ft (2.7 m) Wire Lead, One Probe Mounting Strap, and a Strip of Double-Sided Adhesive Foam Tape; All Factory Assembled |
| FX-WRZSST-120 | Wireless Sensing System Tool: For Use with an FX-WRZSTRxx-0 Series Transmitter, to Function as a Site Survey Tool for the FX-WRZ Series One-to-One Wireless Room Sensing System, or for the FX-ZFR Wireless Field Bus System |
| T-4000-119 | Allen-Head Adjustment Tool: 1/16 in. (1.6 mm), for the Tamper-Resistant Set Screw That Secures the Temperature Transmitter to the Mounting Base; 30 Tools per Bag |

Technical Specifications

| FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies (Part 1 of 2) | |
|---|---|
| Power Requirements | 3 VDC Supplied by Two 1.5 VDC AA Alkaline Batteries (Included with Transmitter); Typical Battery Life: 5 Years or More |
| Addressing | DIP Switches, Field Adjustable; Master-Slave/Token-Passing (MS/TP) Address, Network Number, and Zone Address |
| Transmitter Ambient Conditions | Operating: 23 to 111°F (-5 to 44°C), 5 to 95% RH, Noncondensing Storage: -4 to 140°F (-20 to 60°C), 5 to 95% RH, Noncondensing |
| Temperature Sensor Probe Ambient Conditions | Operating: -40 to 95°F (-40 to 35°C) Storage: -40 to 140°F (-40 to 60°C), 5 to 98% RH, Noncondensing |
| RF Band | Direct-Sequence, Spread-Spectrum; 2.4 GHz ISM Band |
| Transmission Power | 10 mW Maximum |
| Transmission Range | Mesh Network Application: 100 ft (30 m) Maximum Indoor Line-of-Sight; 50 ft (15 m) Practical Average Indoor Non-mesh Network, One-to-One Application: 150 ft (45 m) Maximum Indoor Line-of-Sight; 100 ft (30 m) Practical Average Indoor |
| Transmissions | Every 120 Seconds (±20 Seconds) |

FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies (Continued)

| FX-WRZSTRxx-0 Series Wireless Refrigerator/Freezer Temperature Transmitter and Probe Assemblies (Part 2 of 2) | |
|---|---|
| Temperature System Broad Range Accuracy | ±1.8F°/±1.0C° Over the Range of -40 to 95°F (-40 to 35°C) |
| Refrigerator/Freezer Narrow Range Accuracy | ±0.9F°/±0.5C° Over the Range of -9 to 41°F (-23 to 5°C) |
| Temperature Sensor Type | External 3k ohm Negative Temperature Coefficient (NTC) Thermistor |
| Materials | Transmitter: NEMA 1 White Plastic Housing Temperature Sensor Probe: Clear Acrylic Cylinder |
| Mounting | Transmitter: Surface Mounted Using Factory-Installed, Double-Sided Adhesive Foam Tape Temperature Sensor Probe: Surface Mounted Using Factory-Installed Probe Mounting Strap with Double-Sided Adhesive Foam Tape Installed |
| Compliance | <p>United States: Transmission Complies with FCC Part 15.247 Regulations for Low Power Unlicensed Transmitters; Transmitter FCC Identification: TFB-MATRIXL or OEJ-WRZRADIO</p> <p>Canada: Industry Canada IC: 5969A-MATRIXL or 279A-WRZRADIO</p> <p>Europe: CE Mark – Johnson Controls, Inc. declares that this product is in compliance with the essential requirements and other relevant provisions of the R&TTE Directive 1999/05/EC.</p> |
| Shipping Weight | 0.55 lb (0.25 kg) |

